

PN

CD135型



- ◎ 耐高纹波,尺寸可调,85℃ 2000小时,可用于大功率电源、UPS不间断电源、变频器等电路中。
High ripple current, Size may be selected, Load life of 2000 hours at 85℃.
Used large power source, Uninterruptible power supplies, Frequency converter circuit .etc.
- ◎ RoHS指令已对应完毕。Adapted to the RoHS directive.

主要技术性能 Specifications


项目 Items	特性 Performance Characteristics					
使用温度范围 Operating temperature range	-40℃ ~+ 85℃			-25℃ ~ +85℃		
额定电压范围 Rated voltage range	10 ~ 100 V			160 ~ 500 V		
标称容量允许偏差 Capacitance tolerance	± 20%(120Hz, +20℃)					
漏电流 Leakage current	I ≤ 0.01CV(μA)或5mA 5分钟 取较小值 (at 20℃, after 5 minutes, Whichever is smaller)					
损耗角正切 (tg δ) Dissipation factor (+20℃, 120Hz)	小于图表中规定的数值 Less than the value specified in the standard products tables					
温度特性 Temperature characteristics (Impedance ratio at 120Hz)	Rated Voltage (V)	10~50	63~100	160~250	350~450	500
	Z-25℃/Z+20℃	4	3	5	8	9
	Z-40℃/Z+20℃	12	10			
高温贮存 Shelf life	+85℃, 1000小时贮存后,加额定工作电压处理30分钟,恢复16小时后: After storage for 1000 hours at +85℃, U _R to be applied for 30 minutes and then resumed 16 hours. 电容量变化率 capacitance change : ± 20%初始测量值以内 Initial measured value. 漏电流 Leakage current : ≤ 初始规定值 Initial measured value. 损耗角正切值 Dissipation factor : ≤ 2倍初始规定值 2times Initial specified Value.					

	使用寿命 (Useful Life)		负载寿命 (Load Life)	耐久性测试 (Endurance Test)
寿命时间(Lifetime)	4000h	> 65000h	2000h	2000h
漏电流(Leakage current)	≤ 初始规定值 Not more than specified value		≤ 初始规定值 Not more than specified value	≤ 初始规定值 Not more than specified value
电容量变化率(Capacitance Change)	± 30%初始测量值内 Within ± 30% initial value		± 20%初始测量值内 Within ± 20% initial value	± 10%初始测量值内 Within ± 10% initial value
损耗角正切值(Dissipation Factor)	≤ 3倍初始规定值 Not more than 300% of specified value		≤ 2倍初始规定值 Not more than 200% of specified value	≤ 1.3倍初始规定值 Not more than 130% of specified value
应用条件 (Condition)				
应用电压(Applied Voltage)	U _R	U _R	U _R	U _R
应用电流 (Applied Current)	I _R	1.2 × I _R	I _R	I _R =0
应用温度 (Applied Temperature)	85℃	40℃	85℃	85℃
失效率(Outlier Percentage)	≤ 1%	≤ 1%	0%	IEC60384

频率的修正系数 Frequency coefficient

Frequency (Hz)	50	100 (120)	300	1k	3k	10k	≥ 20K
Rated Voltage (V)							
10~50	0.95	1.00	1.04	1.10	1.12	1.15	1.15
63~100	0.95	1.00	1.06	1.16	1.22	1.30	1.36
160~500	0.80	1.00	1.10	1.25	1.35	1.50	1.55

寿命时间图 Life Time Graph

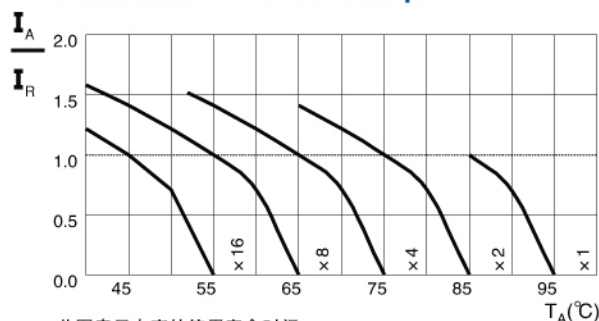

■ 尺寸 Dimensions

UR (SV)	Capacitance	Dissipation Factor	Max ESR 20°C, 120Hz	Typ ESR 20°C, 120Hz	Ripple Current 85°C, 120Hz	SIZE D × L
(V)	(μF)	-	(mΩ)	(mΩ)	(Arms)	(mm)
10 (13)	33000	0.80	34.7	20.5	4.3	35 × 50
	39000	0.80	29.4	17.6	4.7	35 × 50
	47000	0.80	24.4	14.6	5.2	35 × 65
	56000	0.80	20.5	12.5	6.1	35 × 80
	68000	0.80	16.9	10.1	6.7	35 × 80
	82000	0.80	14.0	9.0	7.7	35 × 100
	100000	0.80	11.5	7.5	8.8	35 × 100
	120000	0.80	9.6	7.1	10.0	35 × 120
	150000	1.00	9.6	6.5	10.8	35 × 120
	180000	1.00	8.0	6.0	12.0	51 × 95
	220000	1.50	9.8	5.0	11.2	51 × 120
	270000	1.50	8.0	4.4	12.8	51 × 120
	330000	1.50	6.5	3.8	15.3	63.5 × 95
	390000	1.50	5.5	3.4	17.3	63.5 × 115
	470000	2.00	6.1	2.9	18.7	63.5 × 130
	560000	2.00	5.1	2.7	19.0	76 × 115
680000	2.00	4.2	2.5	21.7	76 × 130	
820000	2.00	3.5	2.4	24.7	76 × 155	
16 (20)	22000	0.60	39.1	22.0	4.1	35 × 50
	27000	0.60	31.8	19.1	4.5	35 × 50
	33000	0.60	26.1	15.7	5.0	35 × 50
	39000	0.60	22.0	13.1	5.9	35 × 65
	47000	0.60	18.3	11.0	6.4	35 × 80
	56000	0.60	15.4	9.5	7.3	35 × 80
	68000	0.60	12.6	7.9	8.4	35 × 100
	82000	0.80	14.0	6.8	8.3	35 × 100
	100000	0.80	11.5	5.8	9.5	35 × 120
	120000	0.80	9.6	5.1	10.9	35 × 120
	150000	1.00	9.6	4.4	11.3	51 × 95
	180000	1.00	8.0	4.0	12.8	51 × 115
	220000	1.00	6.5	3.4	15.3	51 × 130
	270000	1.00	5.3	3.0	16.6	63.5 × 95
	330000	1.50	6.5	2.8	17.8	63.5 × 115
	390000	1.50	5.5	2.6	18.3	63.5 × 130
	470000	1.50	4.6	2.4	21.3	76 × 120
	560000	1.50	3.8	2.2	23.6	76 × 130
	680000	1.50	3.2	2.0	27.6	76 × 155
	820000	2.00	3.5	1.9	27.1	89 × 155
25 (32)	15000	0.50	47.8	22.0	3.7	35 × 50
	18000	0.50	39.8	18.0	4.1	35 × 50
	22000	0.50	32.6	15.8	4.5	35 × 50
	27000	0.50	26.5	12.8	5.0	35 × 65
	33000	0.50	21.7	11.0	5.9	35 × 80
	39000	0.50	18.4	9.4	6.7	35 × 80
	47000	0.50	15.2	7.8	7.7	35 × 100
	56000	0.60	15.4	6.8	7.9	35 × 100
	68000	0.60	12.6	5.8	9.1	35 × 120
	82000	0.60	10.5	5.1	10.4	35 × 120
	100000	0.80	11.5	4.4	10.3	51 × 95
	120000	0.8	9.6	4.0	11.7	51 × 115
	150000	0.8	7.6	3.4	14.1	51 × 130

UR (SV)	Capacitance	Dissipation Factor	Max ESR 20°C, 120Hz	Typ ESR 20°C, 120Hz	Ripple Current 85°C, 120Hz	SIZE D × L	
(V)	(μF)	-	(mΩ)	(mΩ)	(Arms)	(mm)	
25 (32)	180000	0.8	6.4	3.0	15.7	63.5 × 95	
	2200000	1.0	6.5	2.8	16.1	63.5 × 115	
	270000	1.0	5.3	2.5	18.6	63.5 × 130	
	330000	1.0	4.4	2.3	21.9	63.5 × 155	
	390000	1.2	4.4	2.2	22.0	76 × 115	
	470000	1.2	3.7	2.0	25.6	76 × 155	
	560000	1.2	3.1	1.8	27.9	89 × 130	
	680000	1.2	2.5	1.5	32.6	89 × 155	
	35 (44)	10000	0.4	57.3	23.6	3.4	35 × 50
		12000	0.4	47.8	20.0	3.7	35 × 50
15000		0.4	38.2	17.0	4.2	35 × 65	
18000		0.4	31.8	13.7	4.9	35 × 80	
22000		0.4	26.1	11.6	5.7	35 × 80	
27000		0.4	21.2	9.4	6.3	35 × 100	
33000		0.4	17.4	9.0	7.2	35 × 100	
39000		0.5	18.4	8.2	7.3	35 × 120	
47000		0.5	15.2	7.9	8.7	51 × 95	
56000		0.6	15.4	7.6	8.6	51 × 95	
68000		0.6	12.6	6.0	9.8	51 × 115	
82000		0.6	10.5	4.8	11.6	63.5 × 95	
100000		0.6	8.6	4.0	13.3	63.5 × 115	
120000		0.6	7.2	3.9	14.8	63.5 × 120	
150000		0.8	7.6	3.6	14.9	63.5 × 130	
180000		0.8	6.4	3.2	17.0	76 × 115	
220000		0.8	5.2	2.9	20.0	76 × 130	
270000		1.0	5.3	2.5	20.3	76 × 155	
330000		1.0	4.4	2.3	23.5	89 × 130	
390000		1.0	3.7	2.0	26.4	89 × 155	
470000	1.0	3.1	1.8	29.6	89 × 155		
50 (63)	5600	0.3	76.7	46.0	3.0	35 × 50	
	6800	0.3	63.2	38.0	3.3	35 × 50	
	8200	0.3	52.4	31.4	3.6	35 × 50	
	10000	0.3	43.0	25.8	4.0	35 × 65	
	12000	0.3	35.8	21.5	4.7	35 × 80	
	15000	0.3	28.6	15.0	5.5	35 × 80	
	18000	0.3	23.9	12.0	6.2	35 × 100	
	22000	0.4	26.1	10.8	6.3	35 × 120	
	27000	0.4	21.2	9.5	7.1	35 × 120	
	33000	0.4	17.4	8.9	8.2	51 × 95	
	39000	0.5	18.4	8.2	8.1	51 × 95	
	47000	0.5	15.2	7.6	9.3	51 × 115	
	56000	0.5	12.8	6.4	10.5	63.5 × 95	
	68000	0.5	10.5	5.3	12.0	63.5 × 95	
	82000	0.5	8.7	4.2	13.7	63.5 × 115	
	100000	0.6	8.6	3.9	14.7	76 × 115	
	100000	0.80			10.3	51 × 95	
	120000	0.6	7.2	3.3	16.7	76 × 115	
150000	0.6	5.7	3.0	19.3	76 × 130		
180000	0.6	4.8	2.5	21.9	76 × 155		
220000	0.6	3.9	2.0	21.4	89 × 130		
270000	0.6	3.2	1.8	24.6	89 × 155		

Screw

尺寸 Dimensions

UR (SV)	Capacitance	Dissipation Factor	Max ESR 20°C, 120Hz	Typ ESR 20°C, 120Hz	Ripple Current 85°C, 120Hz	SIZE D × L
(V)	(μF)	—	(mΩ)	(mΩ)	(Arms)	(mm)
63 (79)	3900	0.25	91.8	47.2	2.7	35 × 50
	4700	0.25	76.2	39.0	3.0	35 × 50
	5600	0.25	64.0	38.4	3.3	35 × 50
	6800	0.25	52.7	31.6	3.6	35 × 65
	8200	0.25	43.7	26.2	4.3	35 × 80
	10000	0.25	35.8	23.3	4.9	35 × 80
	12000	0.25	29.9	18.0	5.6	35 × 100
	15000	0.3	28.6	16.0	5.9	35 × 100
	18000	0.3	23.9	14.6	6.7	35 × 120
	22000	0.3	19.5	13.0	7.8	35 × 120
	27000	0.4	21.2	12.4	7.4	51 × 95
	33000	0.4	17.4	7.9	8.4	51 × 95
	39000	0.4	14.7	7.4	9.5	51 × 115
	47000	0.4	12.2	6.2	11.3	51 × 130
	56000	0.4	10.2	5.5	12.8	63.5 × 115
	68000	0.5	10.5	5.3	12.7	63.5 × 120
	82000	0.5	8.7	4.4	14.5	63.5 × 130
	100000	0.5	7.2	3.6	16.7	76 × 115
120000	0.5	6.0	3.0	18.9	76 × 130	
150000	0.5	4.8	2.4	22.4	76 × 155	
180000	0.6	4.8	2.4	22.4	89 × 130	
220000	0.6	3.9	2.0	26.2	89 × 155	
80 (100)	3300	0.25	109	54.0	2.5	35 × 50
	3900	0.25	91.8	46.0	2.8	35 × 50
	4700	0.25	76.2	38.1	3.0	35 × 65
	5600	0.25	64.0	32.0	3.6	35 × 80
	6800	0.25	52.7	26.4	3.9	35 × 80
	8200	0.25	43.7	22.1	4.5	35 × 80
	10000	0.25	35.8	17.1	5.2	35 × 100
	12000	0.25	29.9	15.0	5.9	35 × 100
	15000	0.25	23.9	12.0	6.8	35 × 120
	18000	0.25	19.9	10.4	7.8	35 × 120
	22000	0.30	19.5	9.8	8.0	51 × 95
	27000	0.30	15.9	8.0	9.2	51 × 95
	33000	0.30	13.0	6.5	10.5	51 × 115
	39000	0.30	11.0	6.0	12.0	51 × 130
	47000	0.30	9.2	4.9	13.6	63.5 × 115
	56000	0.40	10.2	4.3	13.4	63.5 × 130
	68000	0.40	8.4	4.0	15.4	76 × 115
	82000	0.40	7.0	3.5	17.5	76 × 130
100000	0.40	5.7	2.8	20.5	76 × 155	
120000	0.40	4.8	2.4	22.4	89 × 130	
100 (125)	1800	0.25	199	48.2	1.9	35 × 50
	2200	0.25	163	44.0	2.1	35 × 50
	2700	0.25	133	38.5	2.3	35 × 50
	3300	0.25	109	34.6	2.6	35 × 65
	3900	0.25	91.8	28.4	3.0	35 × 80
	4700	0.25	76.2	26.3	3.5	35 × 80
	5600	0.25	64.0	23.0	3.9	35 × 100
	6800	0.25	52.7	21.8	4.5	35 × 100

UR (SV)	Capacitance	Dissipation Factor	Max ESR 20°C, 120Hz	Typ ESR 20°C, 120Hz	Ripple Current 85°C, 120Hz	SIZE D × L	
(V)	(μF)	—	(mΩ)	(mΩ)	(Arms)	(mm)	
100 (125)	8200	0.25	43.7	20.0	5.1	35 × 120	
	10000	0.25	35.8	18.7	5.9	35 × 120	
	12000	0.25	29.9	16.0	6.4	51 × 75	
	15000	0.25	23.9	11.5	7.0	51 × 95	
	18000	0.25	19.9	9.8	8.3	51 × 115	
	22000	0.25	16.3	7.9	10.0	51 × 130	
	27000	0.25	13.3	6.8	11.5	63.5 × 115	
	33000	0.25	10.9	5.5	11.9	63.5 × 130	
	39000	0.25	9.2	4.9	13.4	76 × 115	
	47000	0.35	10.7	5.5	14.2	76 × 130	
	56000	0.35	9.0	4.0	16.0	76 × 155	
	68000	0.35	7.4	3.4	18.8	89 × 130	
	82000	0.35	6.1	3.0	20.5	89 × 155	
	100000	0.35	5.0	2.5	24.0	89 × 170	
	160 (200)	3300	0.25	109	30.7	5.2	35 × 120
		3900	0.25	91.8	26.2	5.3	51 × 75
		4700	0.25	76.2	20.8	5.9	51 × 75
		5600	0.25	64.0	18.8	7.0	51 × 95
6800		0.25	52.7	16.2	7.8	51 × 95	
8200		0.25	43.7	13.5	9.1	51 × 115	
10000		0.25	35.8	12.9	10.4	63.5 × 95	
12000		0.25	29.9	10.2	11.3	63.5 × 95	
15000		0.25	23.9	9.0	14.3	63.5 × 130	
18000		0.25	19.9	7.5	15.6	63.5 × 130	
22000		0.25	16.3	6.4	18.3	76 × 130	
27000		0.25	13.3	5.2	20.2	76 × 130	
33000		0.25	10.9	3.6	23.8	89 × 130	
39000		0.25	9.2	2.6	27.9	89 × 155	
200 (250)		2200	0.25	163	38.5	3.9	35 × 100
		2700	0.25	133	26.4	4.7	35 × 120
		3300	0.25	109	23.5	4.9	51 × 75
		3900	0.25	91.8	21.4	5.3	51 × 75
	4700	0.25	76.2	19.5	6.4	51 × 95	
	5600	0.25	64.0	17.5	7.6	51 × 115	
	6800	0.25	52.7	13.7	8.8	51 × 130	
	8200	0.25	43.7	11.3	9.4	63.5 × 95	
	10000	0.25	35.8	9.4	10.4	63.5 × 95	
	12000	0.25	29.9	8.6	12.4	76 × 95	
	15000	0.25	23.9	7.3	14.4	76 × 95	
	18000	0.25	19.9	5.9	16.5	76 × 130	
	22000	0.25	16.3	4.1	19.6	76 × 155	
	27000	0.25	13.3	3.2	21.5	89 × 130	
	33000	0.25	10.9	2.5	25.3	89 × 155	
	250 (300)	1500	0.25	239	49.1	3.2	35 × 100
		1800	0.25	199	41.1	3.5	35 × 100
		2200	0.25	163	32.5	4.0	51 × 75
2700		0.25	133	27.7	4.4	51 × 75	
3300		0.25	109	23.1	5.4	51 × 95	
3900		0.25	91.8	20.0	6.3	51 × 115	
4700		0.25	76.2	16.5	7.1	63.5 × 95	

■ 尺寸 Dimensions

UR (SV)	Capacitance	Dissipation Factor	Max ESR 20°C, 120Hz	Typ ESR 20°C, 120Hz	Ripple Current 85°C, 120Hz	SIZE D × L
(V)	(μF)	-	(mΩ)	(mΩ)	(Arms)	(mm)
250 (300)	5600	0.25	64.0	14.2	7.8	63.5 × 95
	6800	0.25	52.7	11.8	9.1	63.5 × 115
	8200	0.25	43.7	11.1	10.0	63.5 × 115
	10000	0.25	35.8	10.7	11.7	63.5 × 130
	12000	0.25	29.9	9.2	12.9	76 × 115
	15000	0.25	23.9	7.3	15.1	76 × 130
	18000	0.25	19.9	5.8	17.7	76 × 155
	22000	0.25	16.3	3.2	20.9	89 × 155
350 (400)	390	0.20	735	268	1.7	35 × 50
	470	0.20	610	228	2.2	35 × 80
	560	0.20	512	190	2.4	35 × 80
	680	0.20	421	152	2.6	35 × 80
	820	0.20	349	126	3.1	35 × 100
	1000	0.20	287	104	3.4	35 × 100
	1200	0.20	239	85.8	3.8	51 × 75
	1500	0.20	191	72.2	4.3	51 × 75
	1800	0.20	159	58.2	5.1	51 × 95
	2200	0.20	130	47.9	5.7	51 × 95
	2700	0.20	107	39.0	7.1	51 × 130
	3300	0.20	86.8	32.1	7.9	51 × 130
	3900	0.20	73.5	27.8	9.0	63.5 × 115
	4700	0.20	61.0	25.0	10.3	63.5 × 130
	5600	0.20	51.2	22.5	11.4	76 × 115
	6800	0.20	42.1	17.1	13.1	76 × 130
	8200	0.20	34.9	14.4	15.4	76 × 155
	10000	0.20	28.6	11.5	18.1	89 × 155
	12000	0.20	23.9	9.8	20.0	89 × 155
	15000	0.20	19.1	7.9	24.5	89 × 195
18000	0.20	15.9	6.5	28.8	89 × 235	
400 (450)	330	0.20	868	280	1.5	35 × 50
	390	0.20	735	236	2.0	35 × 80
	470	0.20	610	189	2.2	35 × 80
	560	0.20	512	163	2.4	35 × 80
	680	0.20	421	132	2.8	35 × 100
	820	0.20	349	107	3.1	35 × 100
	1000	0.20	287	85	3.5	51 × 75
	1200	0.20	239	72	3.8	51 × 75
	1500	0.20	191	58.0	4.7	51 × 95
	1800	0.20	159	47.2	5.5	51 × 95
	2200	0.20	130	38.1	6.4	51 × 120
	2700	0.20	107	33.2	7.0	63.5 × 95
	3300	0.20	86.8	31.2	8.2	63.5 × 115
	3900	0.20	73.5	25.1	9.4	63.5 × 130
	4700	0.20	61.0	23.7	10.4	76 × 115
	5600	0.20	51.2	19.0	11.9	76 × 130
	6800	0.20	42.1	15.5	14.1	76 × 155
	8200	0.20	34.9	13.5	16.4	89 × 155
	10000	0.20	28.6	11.1	18.3	89 × 155

UR (SV)	Capacitance	Dissipation Factor	Max ESR 20°C, 120Hz	Typ ESR 20°C, 120Hz	Ripple Current 85°C, 120Hz	SIZE D × L
(V)	(μF)	-	(mΩ)	(mΩ)	(Arms)	(mm)
400 (450)	12000	0.20	23.9	9.8	21.8	89 × 195
	15000	0.20	19.1	8.0	26.3	89 × 235
450 (500)	270	0.20	1061	421	1.4	35 × 50
	330	0.20	868	280	1.8	35 × 80
	390	0.20	735	243	2.0	35 × 80
	470	0.20	610	200	2.2	35 × 80
	560	0.20	512	173	2.6	35 × 100
	680	0.20	421	140	2.8	35 × 100
	820	0.20	349	112	3.2	51 × 75
	1000	0.20	287	89	3.5	51 × 75
	1200	0.20	239	72.0	4.2	51 × 95
	1500	0.20	191	58.5	5.1	51 × 115
	1800	0.20	159	49	5.9	51 × 130
	2200	0.20	130	39.5	6.3	63.5 × 95
	2700	0.20	106	31.6	7.5	63.5 × 115
	3300	0.20	86.8	30.0	8.7	63.5 × 130
	3900	0.20	73.5	26.5	9.5	76 × 115
	4700	0.20	61.0	21.5	10.9	76 × 130
	5600	0.20	51.2	16.5	12.8	76 × 155
	6800	0.20	42.1	14.4	15.0	89 × 155
	8200	0.20	34.9	12.1	16.5	89 × 155
	10000	0.20	28.6	10.0	20.0	89 × 195
12000	0.20	23.9	8.0	23.6	89 × 235	
500 (550)	1000	0.25	331	106	3.5	51 × 100
	1500	0.25	221	70.7	4.5	51 × 115
	2200	0.25	150	48.2	6.4	63.5 × 120
	2700	0.25	122	39.2	7.6	76 × 120
	3300	0.25	100	32.1	8.5	76 × 130
	3900	0.25	85	27.2	9.8	76 × 150
	4700	0.25	70.5	22.5	10.5	89 × 130
	5600	0.25	59.2	18.9	11.8	89 × 150
6800	0.25	48.7	15.5	13.6	89 × 170	